


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMERICAN STAINLESS PUMPS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF AMERICAN STAINLESS PUMPS IS PROHIBITED.

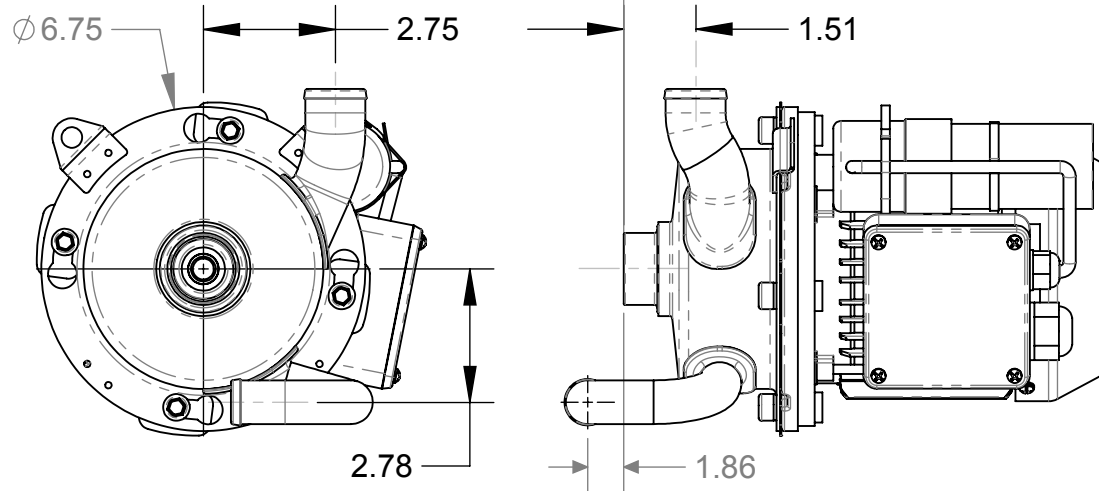

AMERICAN STAINLESS PUMPS

ASP

Cat: FDP2AH
PEI_{NA} Imp Dia: 4.38
Model: FDP SN: 20H217045
HP/RPM: 1/3500 Size: hose

Rotation www.aspumps.com




IEC 60034-1



SINGLE PHASE MOTOR

MODEL	GA2763	DATE
AUTO THERMALLY PROTECTED MEJ36RX	PHASE 1	MTG. 71/56J
IC CODE IC411	INS. CL. F	DUTY CONT
		WGT. 15.9 lbs. 7.2 kg.

115V	60 Hz	230V	60 Hz
H. P. 1.0	KW 0.75	H. P. 1.0	KW 0.75
R. P. M. 3420	FLA 9.6	R. P. M. 3420	FLA 4.8
S. F. 1.15	SFA 10.8	S. F. 1.15	SFA 5.4
EFF% 74.1	P. F. 0.99	EFF% 74.1	P. F. 0.99

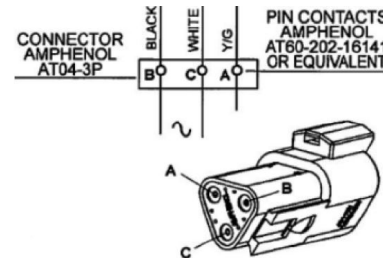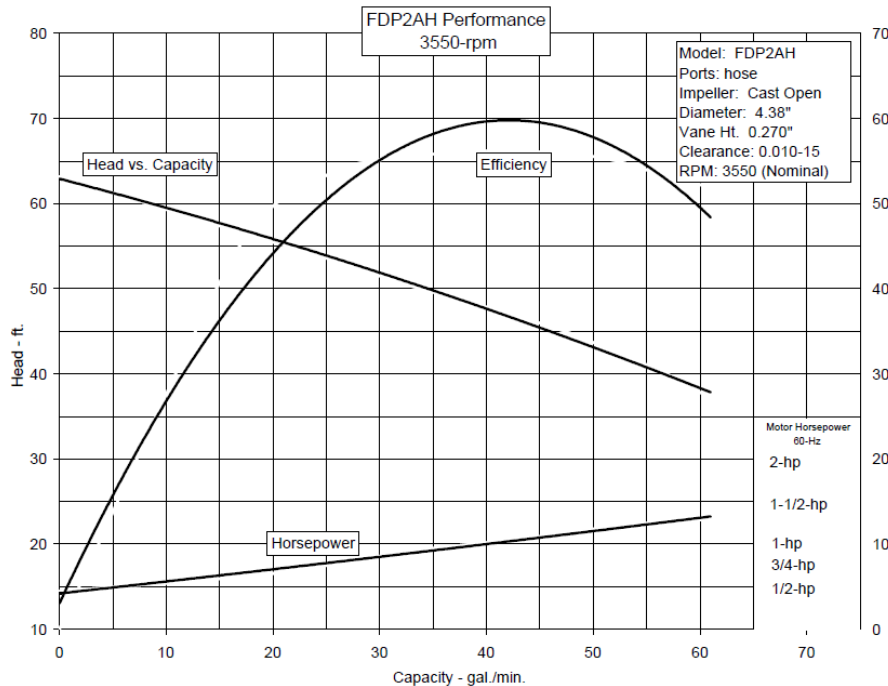

MATERIAL:

MANUFACTURING PROCESS:

CAD GENERATED DRAWING
NOT FOR CONSTRUCTION
UNLESS INDICATED
DO NOT SCALE DRAWING.



AMERICAN STAINLESS PUMPS
LOS ANGELES, CALIFORNIA

PART NO.

SHEET NAME:

Dimension Performance Nameplate Data

DRAWN BY: MWC
CHECKED BY: MFB
RELEASED BY: BOTH
SHEET: A

FILE NAME:

FDP2AH Spec Sheet

SCALE: 1:8

PATH:

REV.

0

DATE

7/29/20

SHEET 1 OF 1

WHEN NOT NOTED OTHERWISE

ALL DIMENSIONS IN INCHES.
REMOVE ALL BURRS.
RADIAL & DIAMETRICAL DIMENSIONS
ARE TO BE HELD TO A ± 0.002
SYMMETRICAL TOLERANCE, AND ARE
CONCENTRIC WITH PART CENTERLINES.

CHAMFER MACHINED EDGES 0.03.
FILLET CORNERS 0.06
MACHINED FACES SURFACE FINISH 63.
QUESTIONS? CALL 310-630-8089.
EMAIL: MCOOL@ASPUMPS.COM

RELEASED FOR CONSTRUCTION?

TOLERANCES UNLESS OTHERWISE INDICATED

FRACTIONS	DECIMAL	ANGULAR
1/X $\pm 1/32$.X ± 0.015	X $\pm .5^\circ$
1/XX $\pm 1/64$.XX ± 0.01	.X $\pm .1^\circ$
	.XXX ± 0.005	.XX $\pm .02^\circ$
	.XXXX ± 0.001	